



60,000 GPD R.O. SYSTEM

GENERAL SPECIFICATIONS

Product SKU	CQE-CO-0648K
Gallons Per Day*	60,000 GPD
Gallons Per Minute	45 GPM
Approx. Weight	1,735 lbs.
Recovery**	33% - 50%
Operating Pressure	150 psi
Maximum TDS	2,000 ppm
Chlorine Tolerance	<1 ppm
Turbidity	1 NTU


MECHANICAL SPECIFICATIONS

Motor HP	5
Voltage (Volts)	110/220
Hertz	50/60

CONNECTION SPECIFICATIONS

Feed Connection	2"
Product Connection	1.5"
Waste Connection	1.5"

MEMBRANE/PREFILTER SPECIFICATIONS

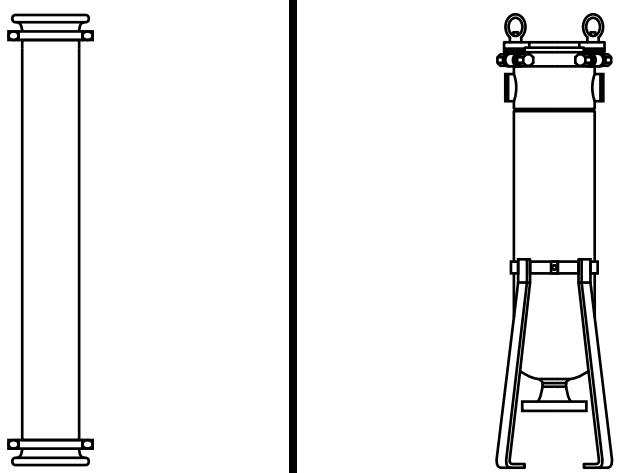

Dimensions	8" x 40"	Dimensions	8" x 29"
Vessel Qty.	12	Vessel Qty.	1
Membrane Qty.	24	Maximum PSI	150




FLOW KEY

Influent Water Flow	
Filtered Water Flow	
Waste Water Flow	

- SYSTEM GAGES**
1. PRE-FILTRATION IN
 2. PRE-FILTRATION OUT
 3. PUMP PRESSURE
 4. WASTE PRESSURE

- NEEDLE VALVE
- CONTROL PANEL
- MULTI-STAGE PUMP
- SEDIMENT PRE-FILTER

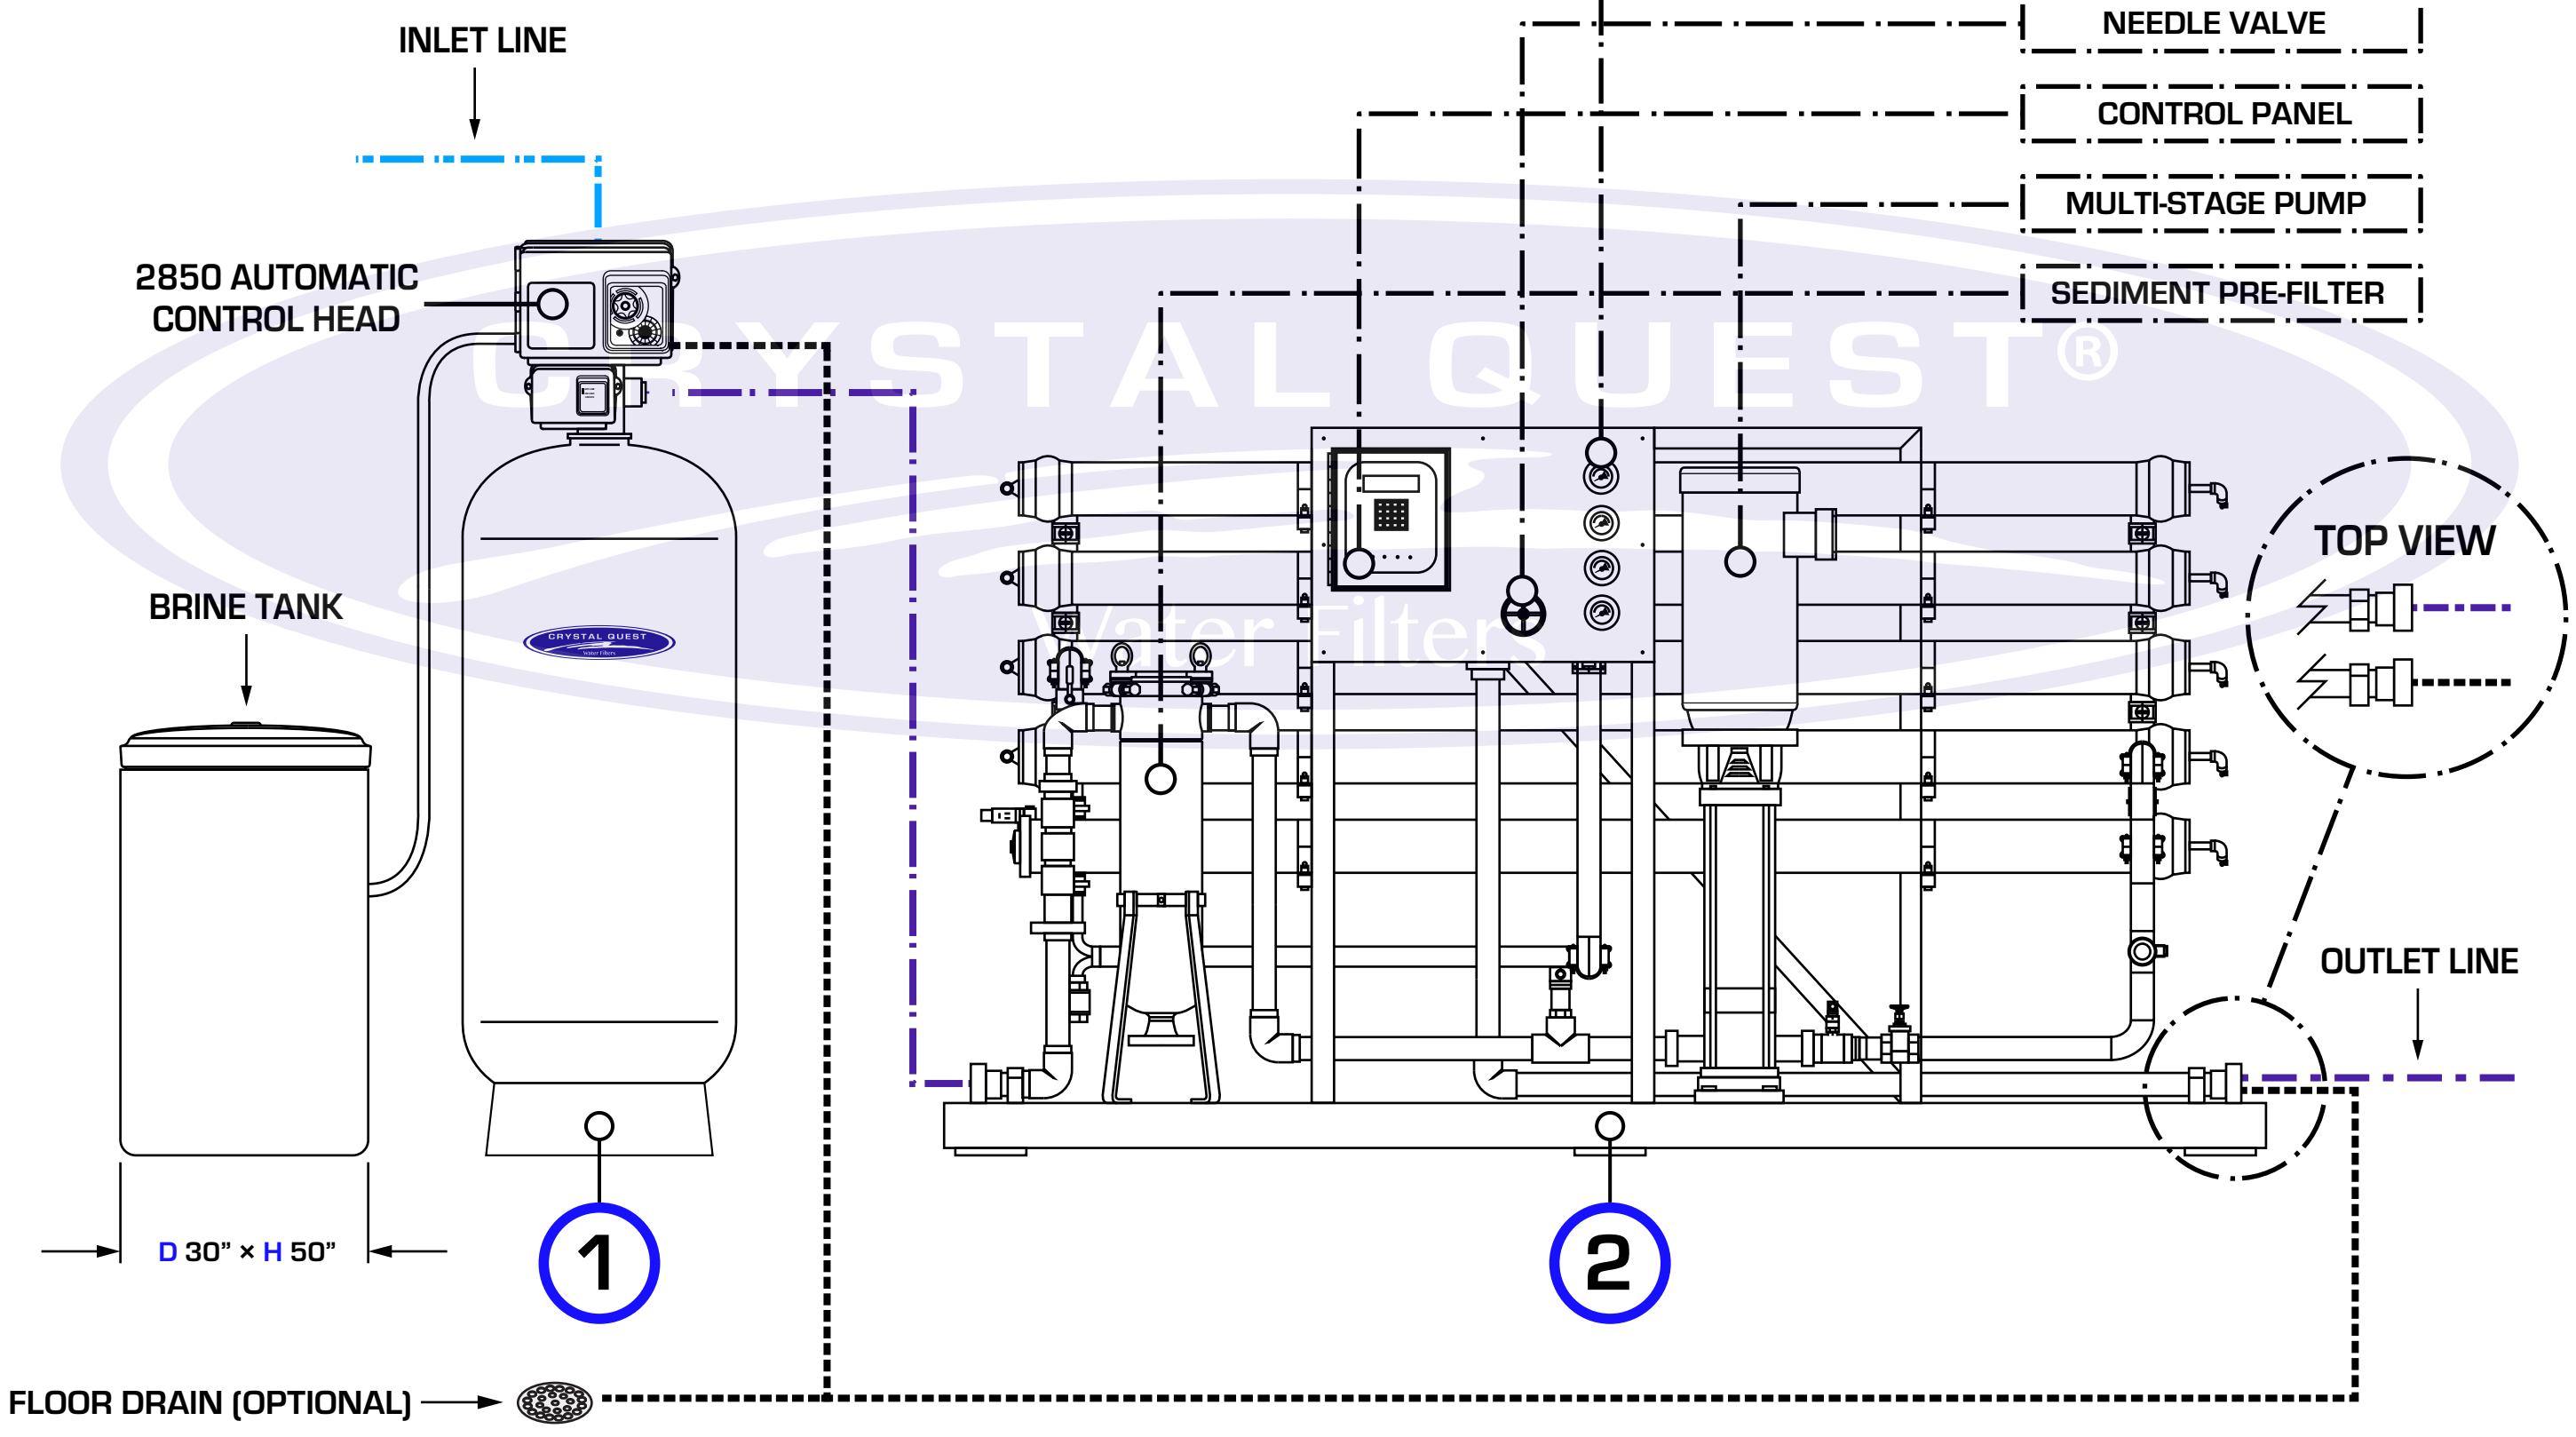

FRONT VIEW

ORDER OF OPERATION:	PRODUCT SKU:	DIMENSIONS:	COMMENTS:	UNLESS OTHERWISE SPECIFIED:	DATE: 11/07/2018 DRAWN BY: DUSTIN
① 60 GPM WATER SOFTENER SYSTEM	CQE-CO-02046	D 24" x H 72"	<ul style="list-style-type: none"> • GPD IS PER 24-HOUR CYCLE. • RECOVERY RATIO MAY VARY FROM 33% - 50% AND UP TO 75% IF SYSTEM PROJECTIONS HAVE BEEN PROVIDED 	DIMENSIONS ARE IN INCHES. DRAWING IS NOT TO SCALE.	TITLE: 60,000 GPD REVERSE OSMOSIS SYSTEM W/ 60 GPM SOFTENER
② 60K GPD REVERSE OSMOSIS SYSTEM	CQE-CO-0684K	L 194" x W 60" x H 72"			
---	---	---	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CRYSTAL QUEST. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CRYSTAL QUEST IS STRICTLY PROHIBITED.	DIMENSION KEY: L → LENGTH W → WIDTH H → HEIGHT D → DIAMETER	SIZE C DWG. NO. 1 REV # A
---	---	---			SCALE: 1:20 WEIGHT: SHEET 1 OF 1
---	---	---			
---	---	---			