



ADA Standards for Accessible Design  
Section 4.15: Drinking Fountains and Water Coolers:

- Spout Height:** Spouts shall be no higher than 36 in (915 mm), measured from the floor or ground surfaces to the spout outlet
- Spout Location:** The spouts of drinking fountains and water coolers shall be at the front of the unit and shall direct the water flow in a trajectory that is parallel or nearly parallel to the front of the unit. The spout shall provide a flow of water at least 4 in (100 mm) high so as to allow the insertion of a cup or glass under the flow of water.
- Controls:** Controls shall comply with 4.27.4. Unit controls shall be front mounted or side mounted near the front edge. (4.27.4. Controls and operating mechanisms shall be operable with one hand and shall not require tight grasping, pinching, or twisting of the wrist. The force required to activate controls shall be no greater than 5 lb)

FW- 750 meets all ADA  
Standards for Accessible Design

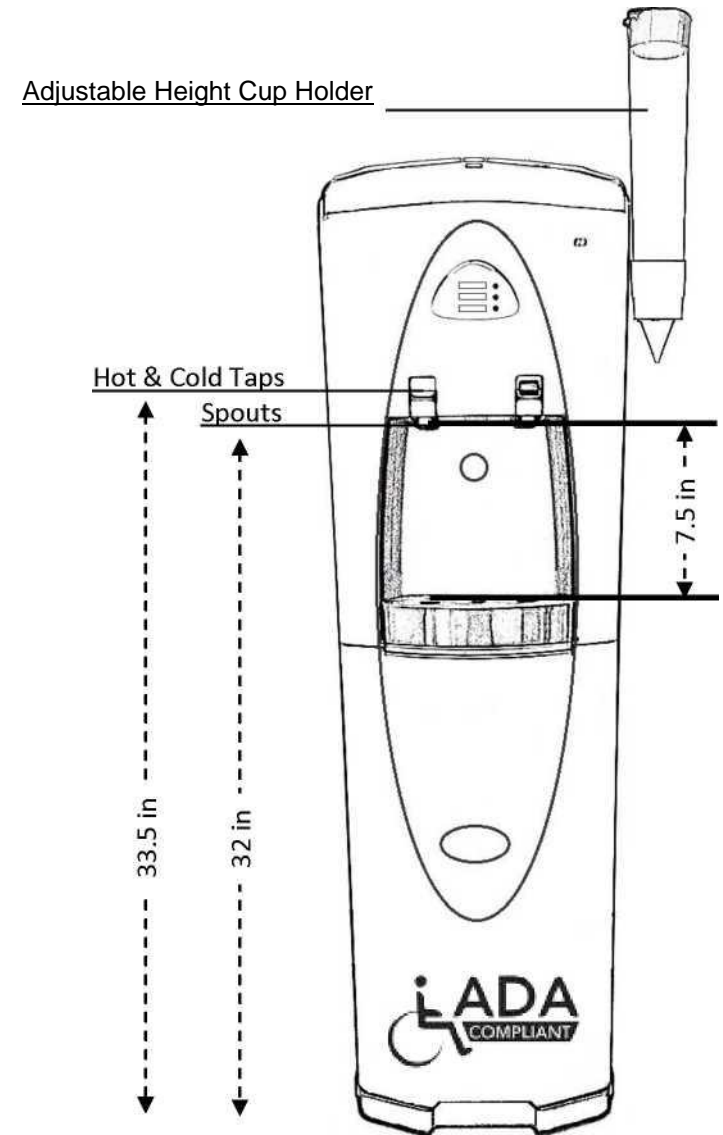

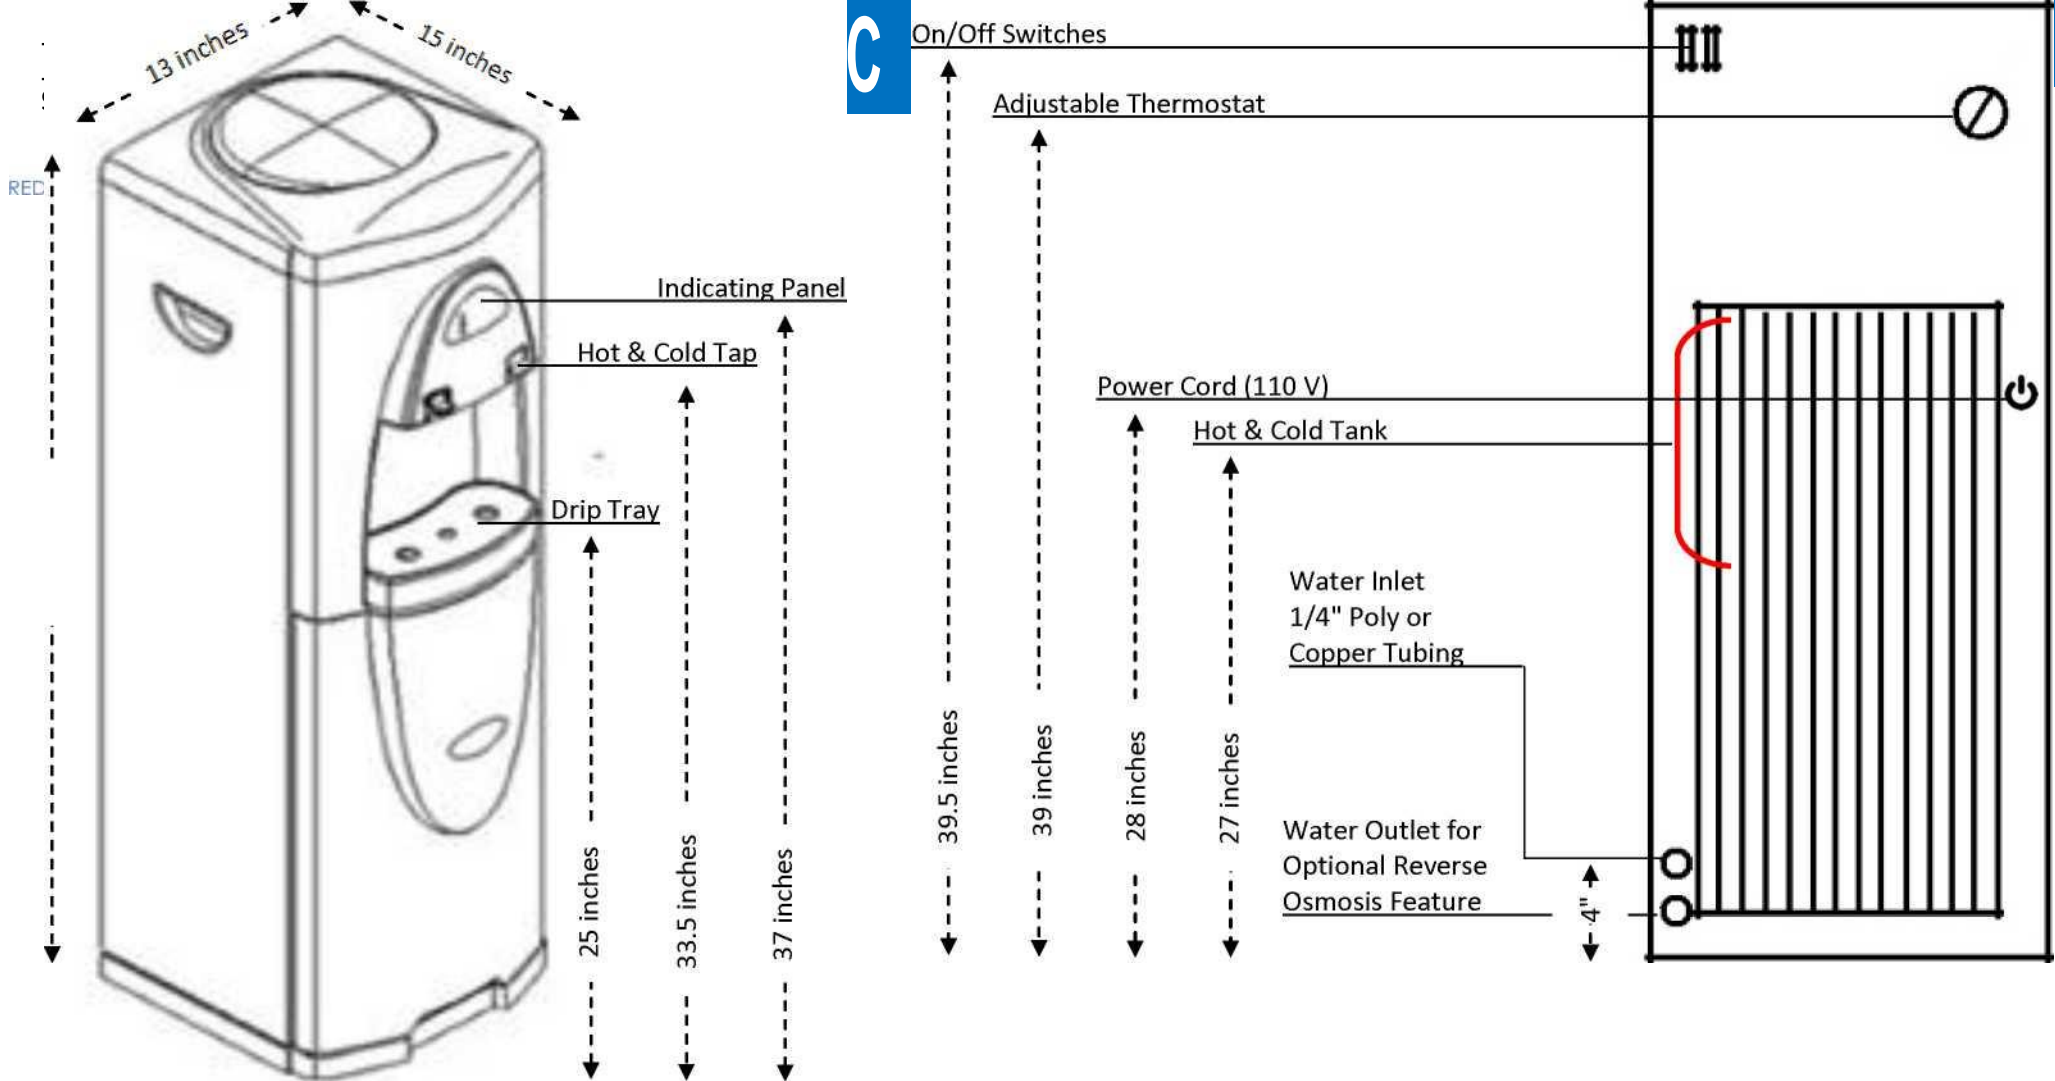

Tel: 1-800-439-0263 | Fax: 215-354-0304  
 P.O. Box 968 Southampton PA 18966-0968  
[www.filterwater.com](http://www.filterwater.com)